

### Pump Performance Datasheet

Customer :	Quote number :
Customer reference :	Size : LVI 040-250
Item number : Default	Stages : 1
Service :	Based on curve number : LVI 40-40-250-2-60
Quantity : 1	Date last saved : 16 Nov 2023 6:19 PM


Operating Conditions		Liquid	
Flow, rated	: 40.08 m3/h	Liquid type	: Water
Head, rated (requested)	: 80.52 m	Additional liquid description	:
Head, rated (actual)	: 80.52 m	Solids diameter, max	: 0.0 mm
Suction pressure, rated / max	: 0.00 / 0.00 bar.g	Solids concentration, by volume	: 0.00 %
NPSH available	: Ample	Temperature	: 20.00 deg C
Site Supply Frequency	: 50 Hz	Fluid density	: 0.999 / 0.999 kg/dm3

Performance		Material	
Speed criteria	: Synchronous	Material selected	: Standard
Speed	: 2875 rpm		
Impeller dia.	: 264 mm		
Impeller diameter, maximum	: 264 mm		
Impeller diameter, minimum	: 208 mm		
Efficiency	: 56.80 %		
NPSH required / margin required	: 4.01 / 0.00 m		
nq (imp. eye flow) / S (imp. eye flow)	: 11 / 107 Metric units		
MCSF	: -		

Performance		Pressure Data	
Head max.	: 90.85 m	Maximum working pressure	: 8.90 bar.g
Head rise to shutoff	: 12.83 %	Maximum allowable working pressure	: 16.00 bar.g
Flow, best eff. point	: 40.08 m3/h	Maximum allowable suction pressure	: 2.50 bar.g
Flow ratio, rated / BEP	: 100.00 %	Hydrostatic test pressure	: 24.00 bar.g
Diameter ratio (rated / max)	: 100.00 %		
Head ratio (rated dia / max dia)	: 100.00 %		
Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00		
Selection status	: Acceptable		


Driver & Power Data (@Max density)	
Driver sizing specification	: Maximum power
Margin over specification	: 0.00 %
Service factor	: 1.00
Power, hydraulic	: 8.78 kW
Power, rated	: 15.45 kW
Power, maximum	: 19.80 kW
Motor rating	: 22.37 kW / 30.00 hp

Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

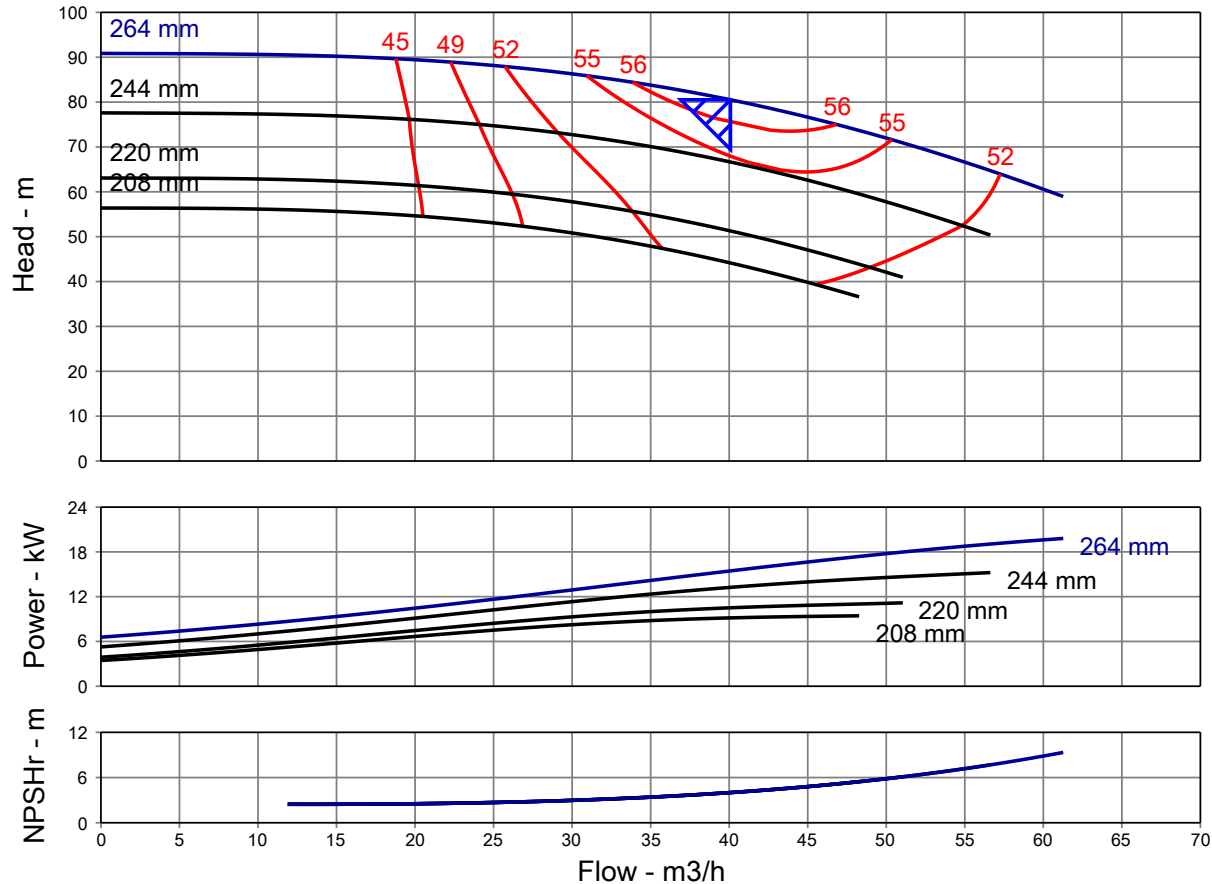

### Pump Performance Curve


Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

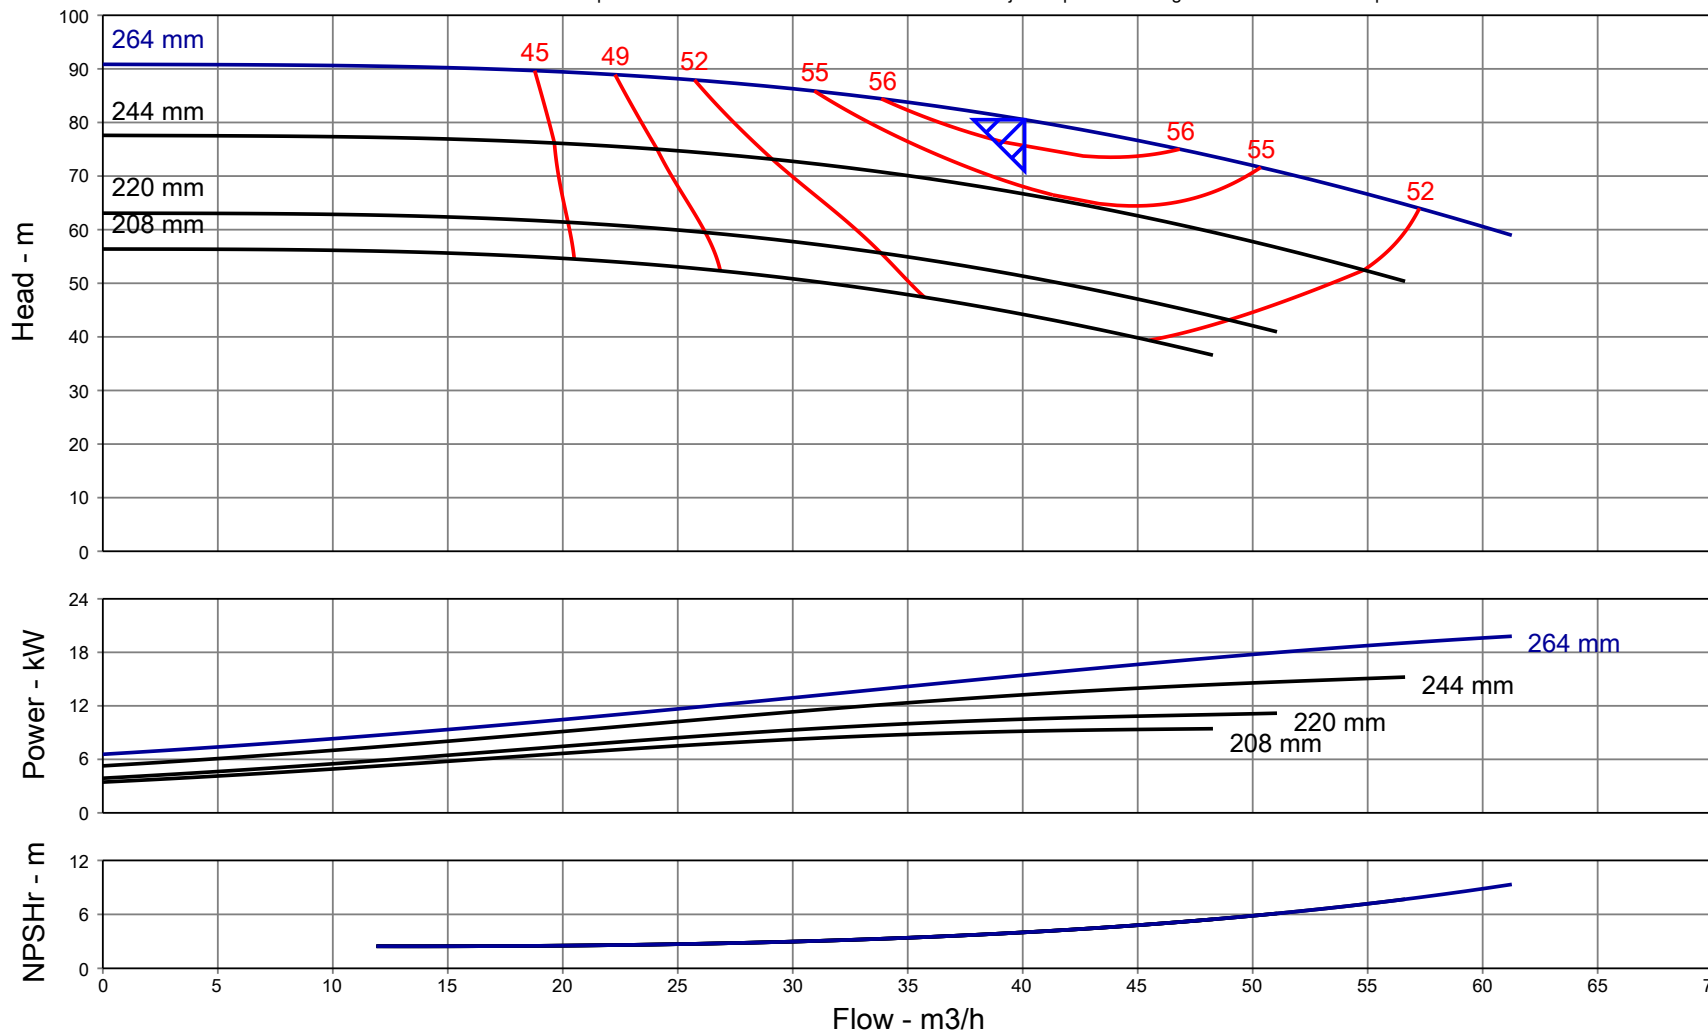

Customer	:	Size	: LVI 040-250	Flow, rated	: 40.08 m <sup>3</sup> /h
Customer reference	:	Stages	: 1	Head, rated	: 80.52 m
Item number	: Default	Speed	: 2875 rpm	Fluid density	: 0.999 / 0.999 kg/dm <sup>3</sup>
Service	:	Based on curve number	: LVI 40-40-250-2-60	Viscosity	: 1.00 cSt
Quantity	: 1	Efficiency	: 56.80 %	Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010]	: 1.00 / 1.00 / 1.00 / 1.00
Quote number	:	Power, rated	: 15.45 kW		
Date last saved	: 16 Nov 2023 6:19 PM	NPSH required	: 4.01 m		

### Multi-Speed Performance Curve

Performance based on test acceptance - ISO 9906:2012 3B. Performances are subject to periodic changes due to continuous improvements.

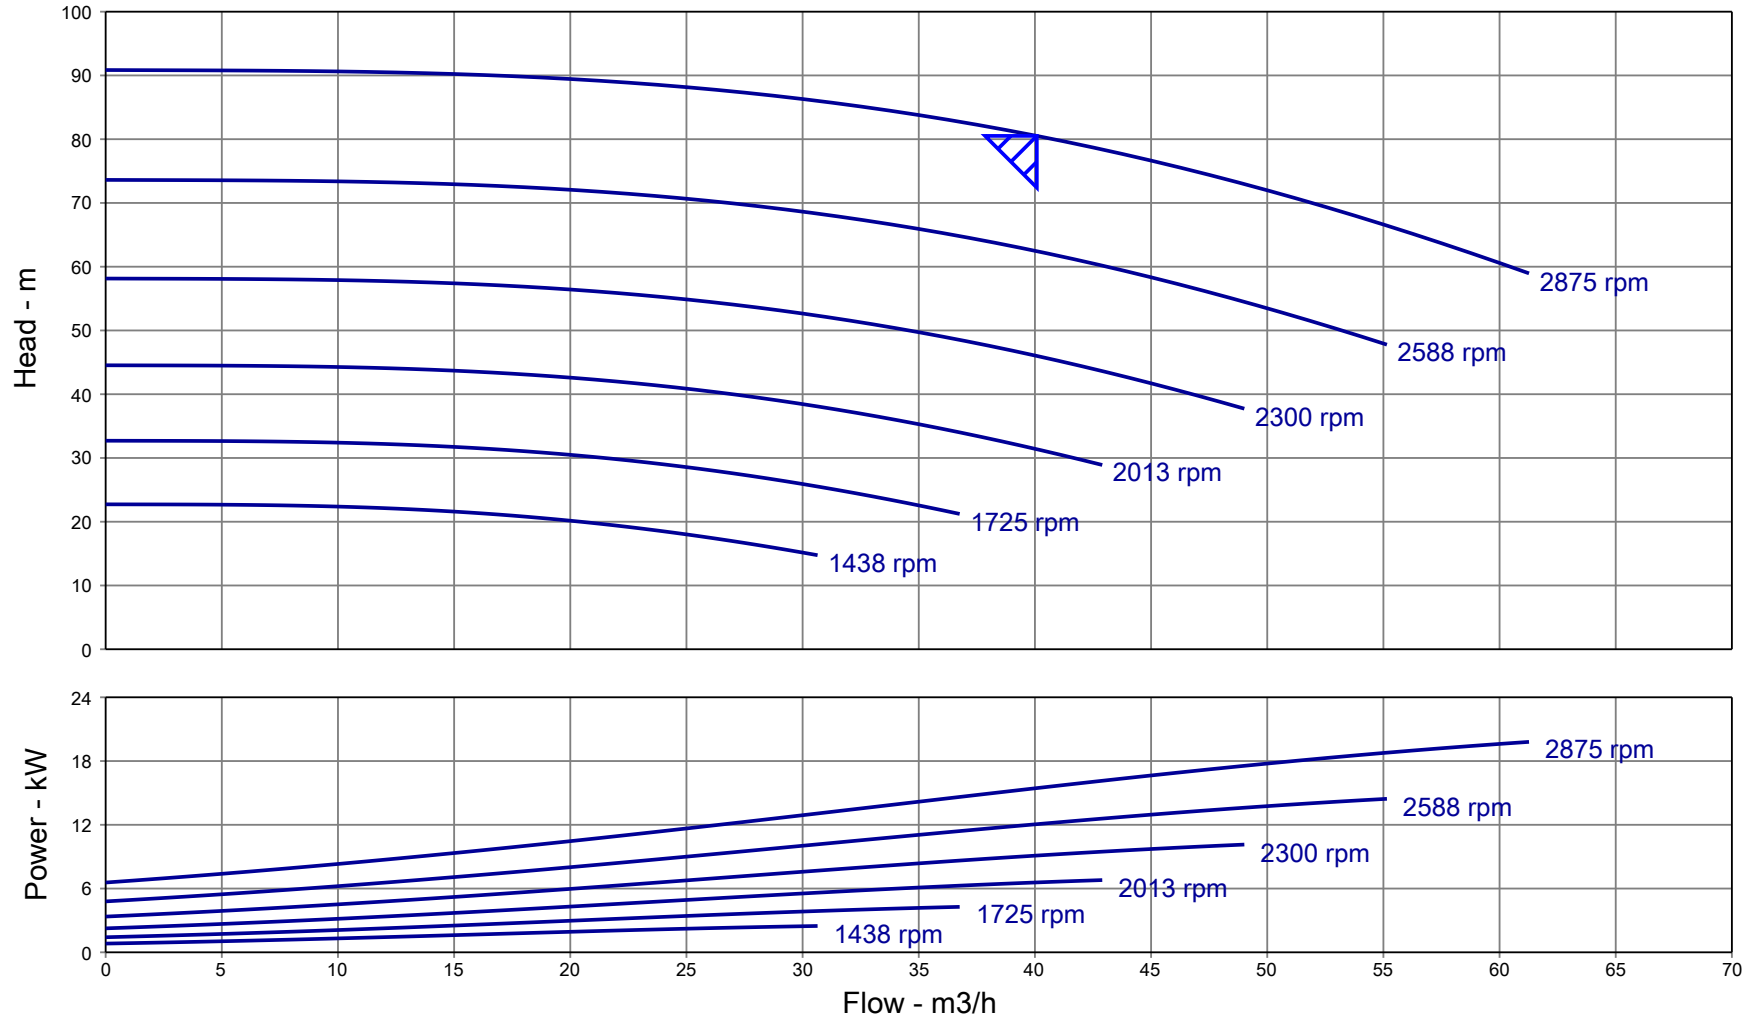

Customer :	Stages :	Nominal speed :
Customer reference :	Based on curve number :	Flow, rated :
Item number : Default	Efficiency : 56.80 %	Head, rated : 80.52 m
Service :	Power, rated : 15.45 kW	Speed : 2875 rpm
Quantity : 1	NPSH required : 4.01 m	Impeller dia. : 264 mm
Quote number :	Site Supply Frequency : 50 Hz	Fluid density : 0.999 / 0.999 kg/dm <sup>3</sup>
Date last saved : 16 Nov 2023 6:19 PM		Viscosity : 1.00 cSt
Size : LVI 040-250		Cq/Ch/Ce/Cn [ANSI/HI 9.6.7-2010] : 1.00 / 1.00 / 1.00 / 1.00



### Life Cycle Cost Datasheet

Customer :	Quantity : 1	Size : LVI 040-250
Customer reference :	Quote number :	Stages : 1
Item number : Default	Date last saved : 16 Nov 2023 6:19 PM	Speed : 2875
Service :		

### Load Profiles and Energy Costs

Expected pump life: 20 years	Load Profile #1	Load Profile #2	Load Profile #3	Load Profile #4	Load Profile #5	Total
Flow: ( m3/h )	15.35	-	-	-	-	-
Operation: ( hours per year )	8,760	-	-	-	-	8,760
Energy cost, present value (\$ per kWh)	0.1	-	-	-	-	-
Speed (rpm)	2875	-	-	-	-	-
Head (m)	90.18	-	-	-	-	-
Efficiency (%)	39.98	-	-	-	-	-
Power, rated (kW)	9.42	-	-	-	-	-
Motor efficiency (%)	100.00	-	-	-	-	-
Drive/gear efficiency (%)	100.00	-	-	-	-	-
System curve		-	-	-	-	-
Energy, total (kWh)	1,649,742.8	-	-	-	-	1,649,742.8
Energy cost, per year	\$ 8,248.71	-	-	-	-	\$ 8,248.71
Energy cost, total present value	\$ 123,717.34	-	-	-	-	\$ 123,717.34

### Life Cycle Cost Calculation

Additional Annual Costs		Additional One-time Costs, Year 0		Interest and Inflation Rates	
Routine maintenance cost :	0.00	Initial investment cost :	0.00	Interest rate, % :	6.00
Repair cost :	0.00	Installation and commissioning cost :	0.00	Inflation rate, % :	3.00
Operating cost :	0.00	Other one-time costs, year 0 :	0.00	<b>Total Net Present Value Costs</b>	
Downtime cost :	0.00	<b>Additional One-time Costs, Year 20</b>		Total energy cost :	\$ 123,717.34
Environmental cost :	0.00	Decommissioning cost :	0.00	Total additional annual cost :	\$ 0.00
Other annual costs :	0.00	Other one-time costs, year 20 :	0.00	Total additional one-time cost :	\$ 0.00
Total, present value :	\$ 0.00	Total, present value :	\$ 0.00	Total life cycle cost :	\$ 123,717.34

### Pump Performance - Additional Data

Customer :	Quote number :
Customer reference :	Size : LVI 040-250
Item number : Default	Stages : 1
Service :	Speed : 2875 rpm
Quantity : 1	Intellicode :
	Date last saved : 16 Nov 2023 6:19 PM

Performance Data	Stage, Speed and Solids Limits
Head, maximum diameter, rated flow : 80.52 m	Stages, maximum : 1
Head, minimum diameter, rated flow : 44.14 m	Stages, minimum : 1
Head max. : 90.85 m	Pump speed limit, maximum : 3600 rpm
Efficiency adjustment factor, total : 1.00	Pump speed limit, minimum : 950 rpm
Power adjustment, total : 0.00 kW	Curve speed limit, maximum : 3600 rpm
Head adjustment factor, total : 1.00	Curve speed limit, minimum : 950 rpm
Flow adjustment factor, total : 1.00	Variable speed limit, maximum : -
Flow adjustment factor, efficiency only (shift BEP) : 1.00	Variable speed limit, minimum : -
Flow adjustment factor, end-of-curve only, total : 1.00	Solids size limit : 0.0 mm

Mechanical Limits	Typical Driver Data
MCSF adjustment factor : 1.00	Driver speed, full load : 2875 rpm
NPSHR adjustment factor, total : 1.00	Driver speed, rated load : 2875 rpm
NPSHR slope correction factor : 1.00	Driver efficiency, 100% load : N/A
User applied performance adjustment comments :	Driver efficiency, 75% load : N/A
NPSH margin dictated by pump supplier : 0.00 m	Driver efficiency, 50% load : N/A
NPSH margin dictated by user : 0.00 m	
NPSH margin used (added to 'required' values) : 0.00 m	

Mechanical Limits	Typical Driver Data
Torque, rated power, rated speed : 5.38 kW/1000 rpm	
Torque, maximum power, rated speed : 6.89 kW/1000 rpm	
Torque, driver power, full load speed : 7.78 kW/1000 rpm	
Torque, driver power, rated speed : 7.78 kW/1000 rpm	
Torque, pump shaft limit : -	
Radial load, worst case : -	
Radial load limit : -	
Impeller peripheral speed, rated : -	
Impeller peripheral speed limit : -	

Various Performance Data	Flow (m3/h)	Head (m)	Efficiency (%)	NPSHr (m)	Power (kW)
Shutoff, rated diameter	0.00	90.85	-	-	6.57
Shutoff, maximum diameter	0.00	90.85	-	-	6.57
MCSF	-	-	-	-	-
Rated flow, minimum diameter	40.08	44.14	52.56	-	9.16
Rated flow, maximum diameter	40.08	80.52	56.80	-	15.45
BEP flow, rated diameter	40.08	80.52	56.80	4.01	15.45
120% rated flow, rated diameter	48.10	73.84	55.68	5.41	17.35
End of curve, rated diameter	61.27	58.96	49.62	9.33	19.80
End of curve, minimum diameter	48.27	36.59	50.92	5.45	9.44
End of curve, maximum diameter	61.27	58.96	49.62	9.33	19.80
Maximum value, rated diameter	-	90.85	56.80	-	19.80
Maximum value, maximum diameter	-	-	56.80	-	19.80

System differential pressure	@ Density, rated	@ Density, max
Differential pressure, rated flow, rated diameter (bar)	7.88	7.88
Differential pressure, shutoff, rated diameter (bar)	8.90	8.90
Differential pressure, shutoff, maximum diameter (bar)	8.90	8.90

Discharge pressure	@ Suction pressure, rated	@ Suction pressure, max	@ Suction pressure, rated	@ Suction pressure, max
Discharge pressure, rated flow, rated diameter (bar.g)	7.88	7.88	7.88	7.88
Discharge pressure, shutoff, rated diameter (bar.g)	8.90	8.90	8.90	8.90
Discharge pressure, shutoff, maximum diameter (bar.g)	8.90	8.90	8.90	8.90

Ratios	
Maximum flow / rated flow, rated diameter : 152.86 %	Head rated diameter / head minimum diameter, rated flow : 182.40 %



### Pump Performance - Additional Data

#### Construction

Vertical In-Line Pump Classifications	: Standard	
---------------------------------------	------------	--